

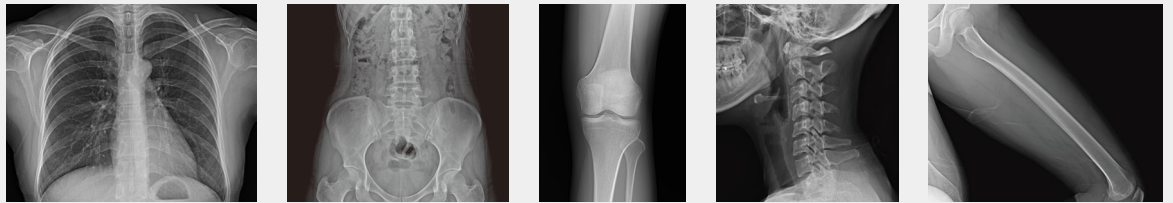


Digital X-ray Detector

| 17HK700G-W | 17HK701G-W | 14HK701G-W |

Superior Image Quality for Diagnostic Confidence

Highly Sensitive Csl AED* Detector with 16bit A/D Conversion (Data Output)



*Auto Exposure Detection

Light yet Durable

IP53: Water Resistance & Dustproof



Solids Level 5
Protected against objects of dust; complete protection against contact.



Liquids Level 3
Protected against spraying water at any angle up to 60° from the vertical shall.

Magnesium & Carbon-fiber Body

With a super strong body that combines carbon-fiber with magnesium, the LG Digital X-ray Detector is not only lightweight but also exceptionally strong.

Product Weight



Maximum Load Weight



Create a More Efficient Workflow

Access Point Mode*

Access Point Mode maximizes the efficiency and portability of the LG Digital X-ray Detector with a built-in access point that allows the device to transmit images to the workstation desktops or laptops directly.

2 sec (Wired) & 2.5 sec (Wireless) for Full Images

The LG Digital X-ray Detector delivers image previews in just 2 sec (Wired) and 2.5 sec (Wireless) for improved efficiency.

Auto Save on the Digital X-ray Detector**

The device can store up to 200 image sheets locally for continued use even in emergency situations when a Wi-Fi connection is not available. These images can then be transmitted once a connection has been established.

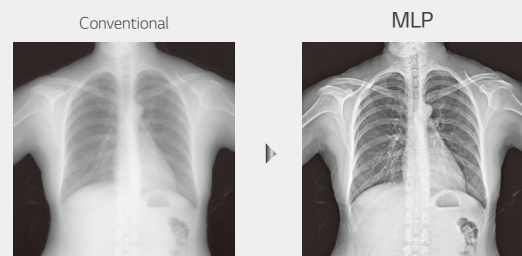
*Access Point Mode, Auto Save on the Digital X-ray Detector : Only for 17HK701G-W, 14HK701G-W

** When 200 sheets have been used, the first image will be erased in the event of continued use, in a first-in, first-out method.

Acquisition Workstation Software(AWS) for LG DXD




Multi-layer Image Processing (MLP)

Multi-layer image processing embedded in AWS provides well-balanced visualization at each frequency level. Its contrast enhancement processing functions such as detail contrast, sharp-en, and de-noise improve tissue visibility within an image.



Specification

Digital X-ray Detector

Model		17HK700G-W (Wired)	17HK701G-W (Wired / Wireless)	14HK701G-W (Wired / Wireless)
Dimension / Weight		460 mm x 460 mm x 15.5 mm 	460 mm x 460 mm x 15.5 mm 	384 mm x 460 mm x 15.2 mm 
		3.2 kg	3.4 kg	2.95 kg
Application		Human, Veterinary		
TFT Type		A-Si		
Scintillator		CsI		
Pixel Pitch		140 μ m		
Image Area	Number of Pixels	3072 x 3072 pixels	3072 x 3072 pixels	2500 x 3052 pixels
	TFT Active Area	430.08 x 430.08 mm	430.08 x 430.08 mm	350 x 427.28 mm
MTF	MTF @ 0.5lp/mm (Typ.)	89%		
DQE	DQE @ 0.1lp/mm (Typ.)	72%		
A/D Conversion		16 bit		
Data Output		16 bit		
Communication	Type	Wired	Wired / Wireless	Wired / Wireless
	WLAN	-	IEEE802.11a/b/g/n/ac 2.4 GHz / 5 GHz	IEEE802.11a/b/g/n/ac 2.4 GHz / 5 GHz
	Auto Exposure Detection	Yes		
Cycle Time		8 sec	8 sec (Ethernet) / 11 sec (WLAN)	8 sec (Ethernet) / 11 sec (WLAN)
Full Image Transfer (Typ.)		2 sec	2 sec (Wired) / 2.5 sec (Wireless)	2 sec (Wired) / 2.5 sec (Wireless)
Auto Save		-	Up to 200 images	Up to 200 images
Access Point Mode		-	Yes (Integrated)	Yes (Integrated)
Durability	Maximum Load Weight	Full (Uniform Load) : 300 kg, 661 lb Local (Point Load) : 100 kg, 220 lb		
	Watertightness	IP53		
	Sensor Protection Plate	Carbon Fiber Plate		
Battery	Operation Time	-	(Typ.) 240 shots / 6.0 hrs (Condition : Interval Time 90 sec)	(Typ.) 260 shots / 6.5 hrs (Condition : Interval Time 90 sec)
	Duration in Standby Status (Typ.)	-	13 hrs	13 hrs
	Charging Time	-	3 hrs	3 hrs
Accessories	Cable	Power Cord, Main Cable 7 m (LAN Cable, Sync Cable Option)		
		-	Battery Charger	
	Other	-	Bundle Battery	
		-	Control Box	

Acquisition Workstation Software

Installation Requirement	OS	Microsoft Windows 7, 10 (64 bit)
	DB	MariaDB
	Processor Options	Intel CPU Desk 6th gen i7 or above
	RAM	8 GB
	HDD	2 TB



LG Electronics Inc.

<https://www.lg.com/global/business/virtual-showroom/medical-display>

Copyright © 2020 LG Electronics. All Rights Reserved.

Authorized Distributor :-
Tritvam care services
8139004300 / 8593005572
sales@tritvamacare.com